


# INSTRUCTION MANUAL

ADULT ASSEMBLY REQUIRED, 12CM OR ADJUSTABLE SPANNER

2. Fix the trainer arm on axle, then put on locking clip (make sure the clip opening stuck on the side frame of bike), tighten the nut.

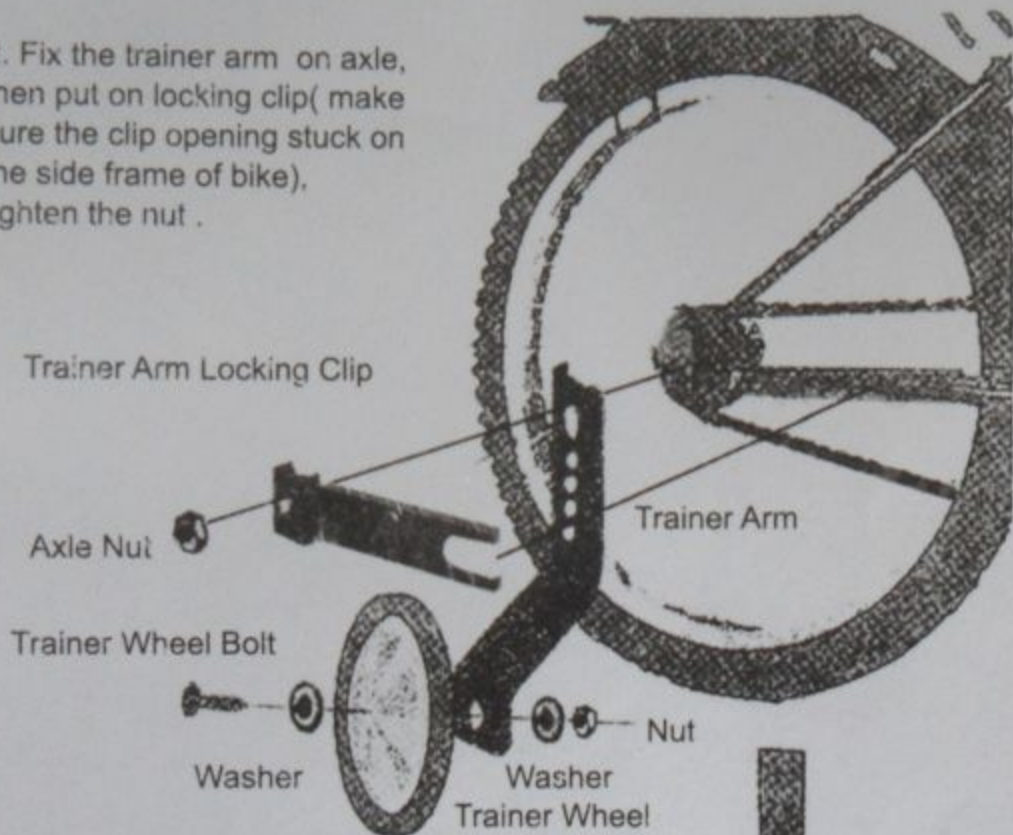

1. Using the nuts and bolts provided install the training wheels as illustrated

Be sure to leave 1/4" clearance below training wheels.

