

SOFT ROOF RACKS INSTRUCTIONS

Keycode: 43171316

WARNING! The maximum total load for this product is 60KG. Never exceed this. It is essential that the load is evenly distributed. Ensure loads are stacked securely and weight is distributed evenly over both roof racks. The product and load being carried must not overhang the sides of the vehicle. Use suitable straps to ensure the load is secure. Avoid elastic straps. In cases of long loads secure the ends of the load with non elastic rope to the vehicle's bumpers. Regularly check the product and load being carried to ensure they are tight and secure at all times. Please refer to the vehicle owners manual for details of any special requirements in relation to the use of roof racks or carriers.

WARNING! After fitting the roof racks drive a short journey then re-check the roof racks to ensure they are still fixed securely. Carrying loads may affect the vehicles handling and stability, especially when cornering or in strong winds. Take special care and avoid heavy breaking or accelerating. The vehicles stopping distance will be longer when carrying a load. Ensure you drive at a sensible speed given the load you are carrying. Never exceed the speed limits and follow all road laws.

WARNING! Always remove the product when going through a car wash. Remember, when this product is fitted the height of the vehicle is increased. We advise removing the roof bars when not in use to improve fuel consumption.

WARNING! IT IS YOUR RESPONSIBILITY TO ENSURE THAT YOU DRIVE SAFELY AND THAT THE PRODUCT AND THE LOAD ARE ALWAYS SECURELY FIXED IN PLACE THROUGHOUT YOUR JOURNEY.

Accept no responsibility for any damage to vehicles, loss of load or personal injury if the rack has not been fitted in accordance with the manufactures instructions and vehicle weight recommendations.

Remove the soft roof racks from the cover. Keep these instructions for future reference.

Contents:

The product consists of 2 pieces of roof racks, please assemble each part step by step.




Instructions

This product is only suitable for 4 door cars without roof rails

1. Open all doors on the vehicle and place the racks onto the roof. The racks must be positioned parallel and a minimum of 60cm apart on the roof.

2. Pass the straps through the vehicle.

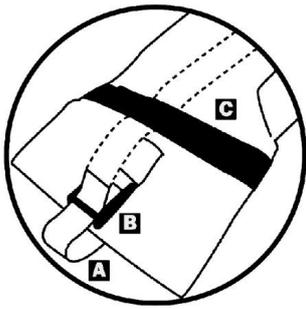

3. Run the straps(A) through the buckles (B) on the opposite side of the vehicle and pull VERY tight to secure the rack to the roof.


4. Pass the straps under the webbing(C).Ensure the straps run under the webbing(C) as this will prevent the load moving when secured.

5. Place load on the racks, ensuring that the load is distributed evenly, pass the straps over the load and place under the webbing(C) on the opposite side of the vehicle. Now run the straps through the buckles(B) and pull Very tight to secure the load.

6. Straps should be secured inside the vehicle ensuring that they do not interfere with driver or any passengers.

7. Use extra straps if the load needs to be secured further. If the load extends beyond the rack additional straps must be used to achieve a secure fitment.

8. Once the load is secure all straps should be safely fixed inside the vehicle to ensure that they do not distract the driver or passengers.

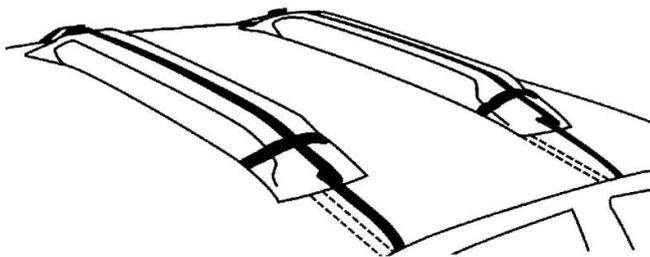

Storage & Care Instructions

Clean with water. Not use abrasive materials or solvents. Not machine washable. Make sure it is completely dry before storing it always store in dark and dry place. Keep away from open flames or heat sources. Oil all metallic moving parts. Do not use this product if you find that the accessories are loose, the product is deformation or damage, or the connection is not firm.

MADE IN CHINA

FOR AU / NZ: IMPORTED FOR KMART
STORES IN AUSTRALIA AND NEW ZEALAND.