


43189571

GOOGLE IS A TRADEMARK OF GOOGLE LLC. AMAZON, ALEXA AND ALL RELATED LOGOS ARE TRADEMARKS OF AMAZON.COM, INC. OR ITS AFFILIATES

Please take a minute to read the below information on setting up this device. The smart strip lights can work with both Amazon Alexa and Google Assistant. After the smart strip lights has been installed it will need to be paired with an APP "TuYa Smart" downloadable from Google Play or the Apple store. Once the TuYa Smart APP is installed, it will then need to be linked with either Amazon Alexa or Google Assistant account to activate the voice control function.


This user manual consists of three parts. Part one is fundamental set-up, part two and three are alternative device set ups. If you use Amazon Alexa for voice control, please follow instructions on part one and two. If you use Google Assistant for voice control, please skip part two, follow the instructions on part one and three.

Part One: Pairing the smart strip lights to "TuYa Smart" App
Part Two: Controlling the smart strip lights with Amazon Alexa
Part Three: Controlling smart strip lights with Google Assistant

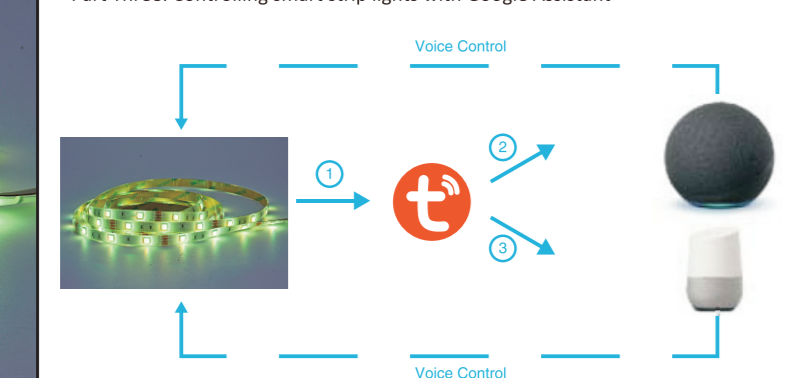


Specification
Input:220V-240V ~ 50/60Hz
(AC adapter XY12J-1201000H-AW) Output:d.c.12V 1A
Dimension: 3M

INSTALLATION:
Before adhering strip lights, clean the surface of the area you will be placing the lights on. It is recommended to apply your strip lights on smooth stable surfaces. It should not be placed on rough, textured or painted wall surfaces or any surfaces that can bend or move.

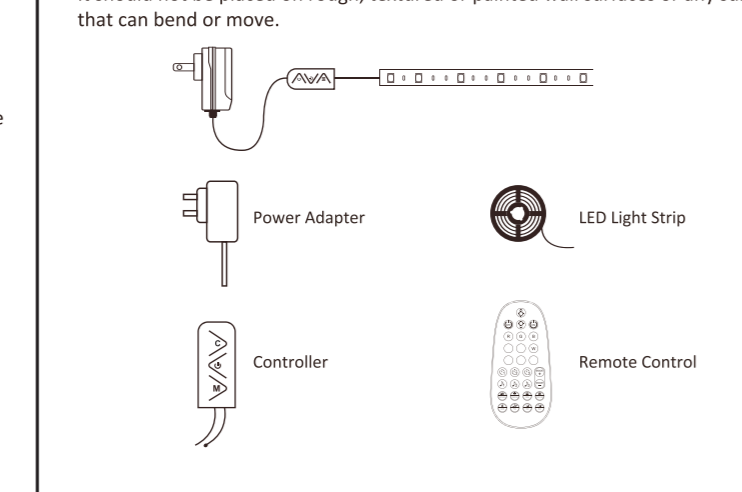

1. Unroll the strip light before usage.
2. Connect to the APP properly before installation.
3. For standalone use only. Do not connect to any more strip lights.
4. Luminares not suitable for covering with thermally insulating material.
5. Do not block the controller with metal objects.
6. There's a built-in microphone inside the controller, please place your music playing device near the controller for better results.
7. The light source of this luminaire is not replaceable, when the light source reaches its end of life the whole luminaire shall be replaced.
8. Where breakage or damage to lamps occurs, the chain must not be used/energized but disposed of safely.
9. The external flexible cable or cord of this luminaire cannot be replaced, if the cord is damaged, the luminaire shall be destroyed.
10. For indoor use only.
11. Aim at the receiver, the range of the remote control is 5M.
12. The control gear used with 43189571/43189588 only.


Product Instructions

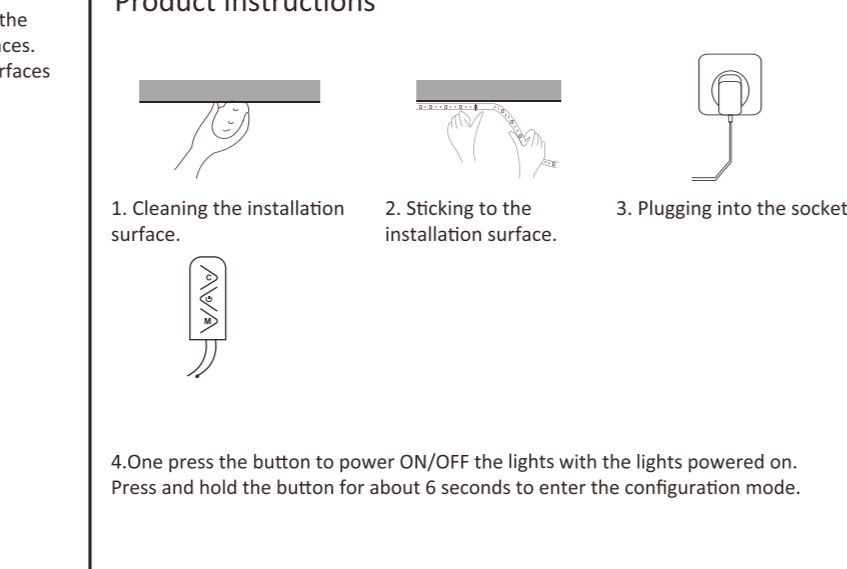


1. Cleaning the installation surface.
2. Sticking to the installation surface.
3. Plugging into the socket.

4. One press the button to power ON/OFF the lights with the lights powered on. Press and hold the button for about 6 seconds to enter the configuration mode.


Part One - How to pair the smart strip light to TuYa Smart App?
Install the TuYa Smart App to control the smart strip light.
Please download and install the app by:
1. Scanning below QR code OR Search "TuYa Smart" in Apple Store or Google Play. Create an account on TuYa Smart and login.



Note: You will need to enter these account details for Alexa or Google Assistant App pairing later

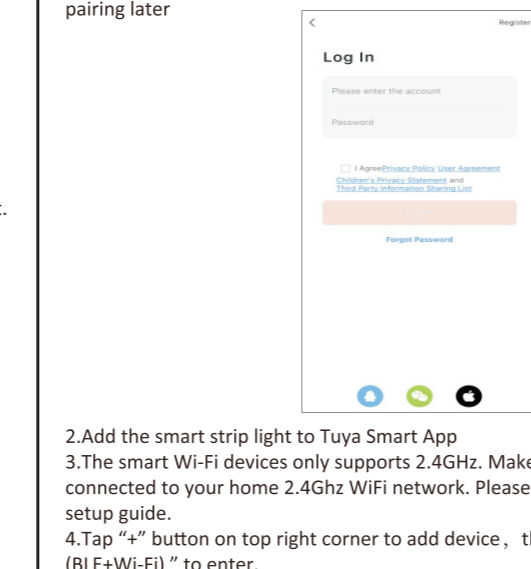


2. Add the smart strip light to TuYa Smart App
3. The smart Wi-Fi devices only supports 2.4GHz. Make sure your mobile device connected to your home 2.4GHz WiFi network. Please refer to your WiFi router setup guide.
4. Tap "+" button on top right corner to add device, then tap "strip lights (BLE-Wi-Fi)" to enter.

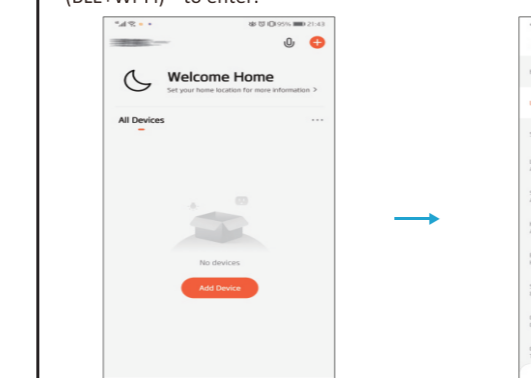


5. Press and hold the middle button of the controller for 6 seconds, the strip light will fast flash in red color, this will then enter Quick Connection Mode. Please make sure the smart strip light is standing. (The strip light in red color and flash 2 times per seconds).

Manual Control by 3 Buttons

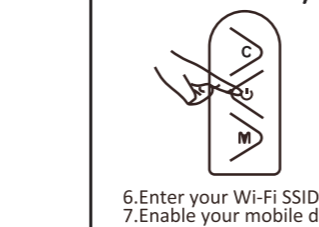


C:Scene mode
Q: Press one time ON/OFF, Press 6 seconds to reset and start to connect network.
M: Music mode.


6. Enter your Wi-Fi SSID name and Wi-Fi password in then tap "Next".
7. Enable your mobile device Bluetooth connection for easy setup mode.

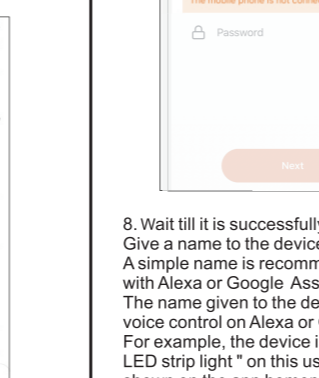


8. Wait till it is successfully connected. Give a name to the device. A simple name is recommended for easier voice recognition with Alexa or Google Assistant. The name given to the device will be the same for voice control on Alexa or Google Assistant. For example, the device is named "Smart LED strip light" in this user manual, the named device will be shown on the app homepage.

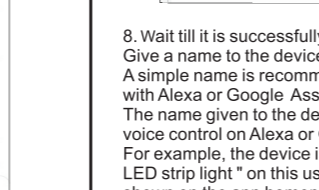

How to Control the smart strip light by TuYa Smart App
Light color mode: you can choose light color and adjust the brightness and saturation.
2. Scene mode: custom scene and recommend scene to choose.

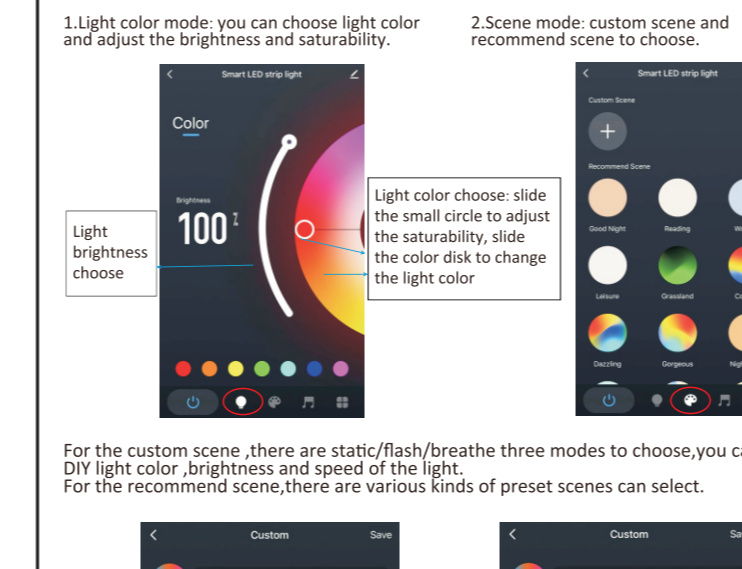


For the custom scene, there are static/flash/breathe three modes to choose, you can DIY light color, brightness and speed of the light. For the recommend scene, there are various kinds of preset scenes can select.

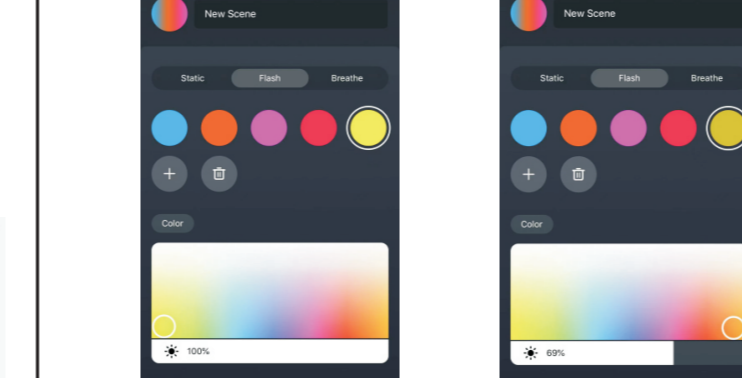


App mode: place your music playing device near the phone mic for better results. Note: the music active mode will close when you close the phone screen.


3. Music mode: There are two music active ways to choose. The strip light function will be changed with the music.

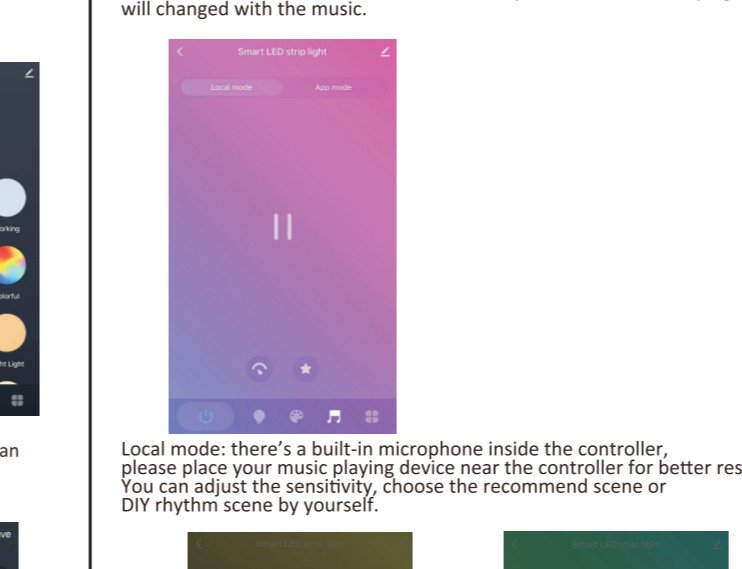


Local mode: there's a built-in microphone inside the controller, please place your music playing device near the controller for better results. You can adjust the sensitivity, choose the recommend scene or DIY rhythm scene by yourself.

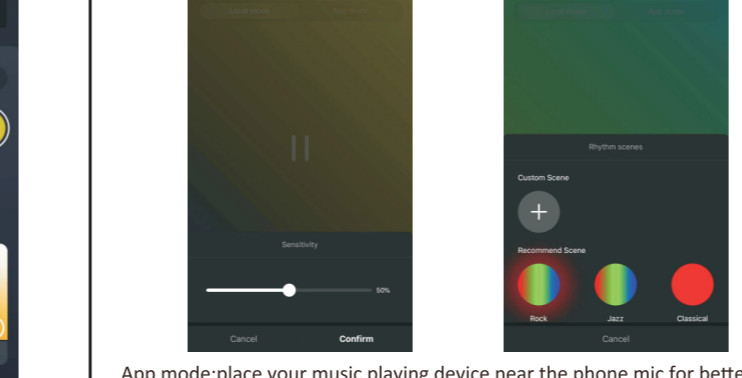


4. Set up your own schedule and timer of the light.

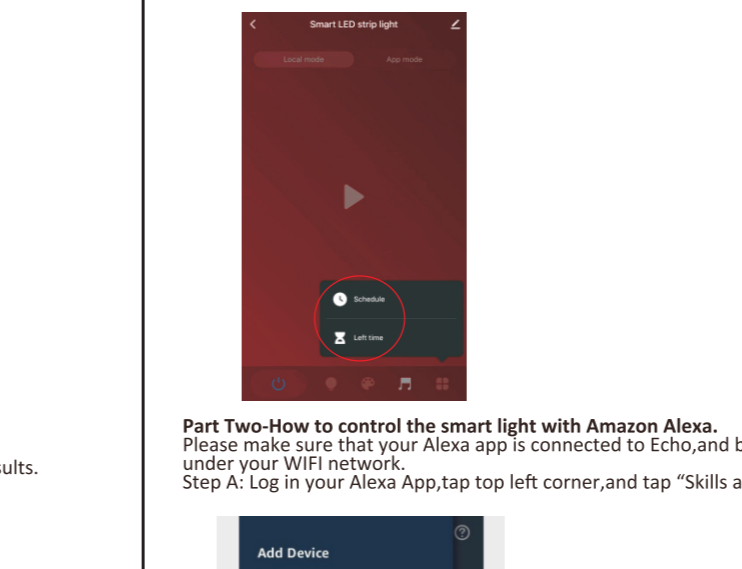


Part Two-How to control the smart light with Amazon Alexa.
Please make sure that your Alexa app is connected to Echo, and both work well under your WiFi network.
Step A: Log in your Alexa App, tap top left corner, and tap "Skills and Games"

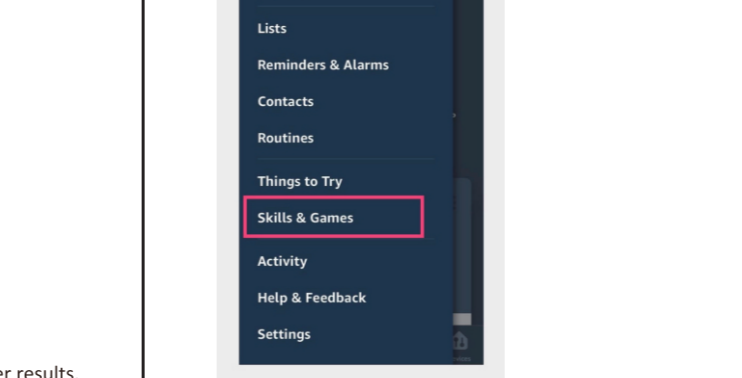

Step B: Type "TuYa Smart", and "TuYa Smart" from the search result, and tap it to enable the skill.

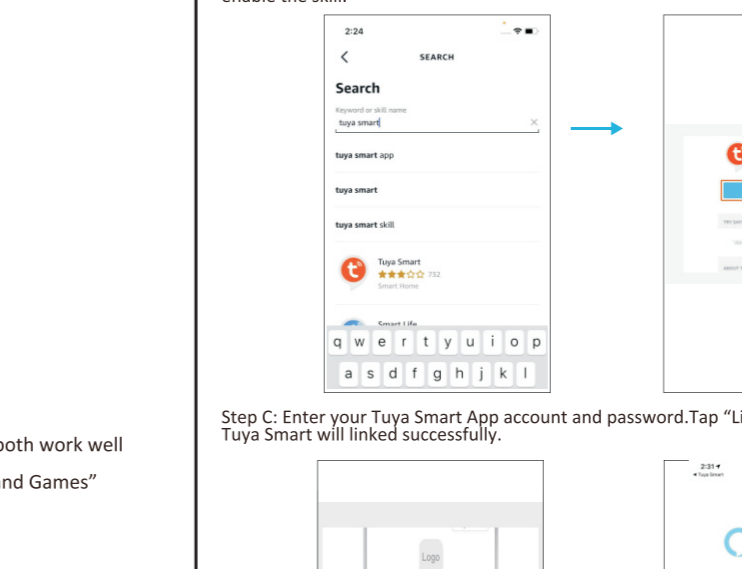


Step C: Enter your TuYa Smart App account and password. Tap "Link Now", then TuYa Smart will linked successfully.

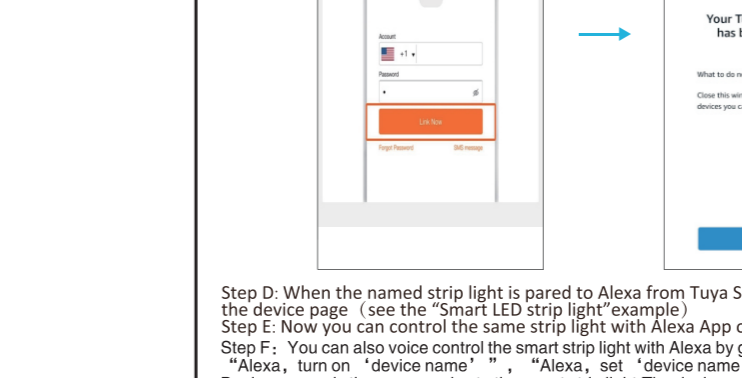


Step D: When the named strip light is paired to Alexa from TuYa Smart, it will show on the device page (see the "Smart LED strip light" example).

Step E: Now you can control the same strip light with Alexa app on the setting page.
Step F: You can also voice control the smart strip light with Alexa by giving voice commands "Alexa, turn on/turn off/turn on/turn off TuYa Smart".
Device name is the one you give to the smart strip light. The device named "Smart LED strip light" in this user guide. For example, "Alexa, turn on/turn off Smart LED strip light".

Part Three-How to control smart light with Google Assistant.
Step A: Log in Google Assistant App, tap "Home control" on the right side bar page.
Step B: Tap "+" button on the bottom right to enter next page.
Step C: Find "TuYa Smart" from side bar list.

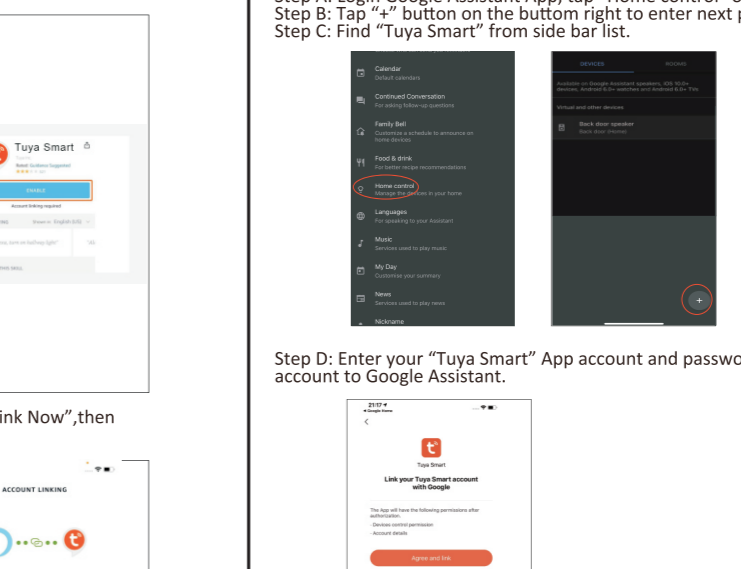


Step D: Enter your "TuYa Smart" App account and password to bind TuYa Smart account to Google Assistant.

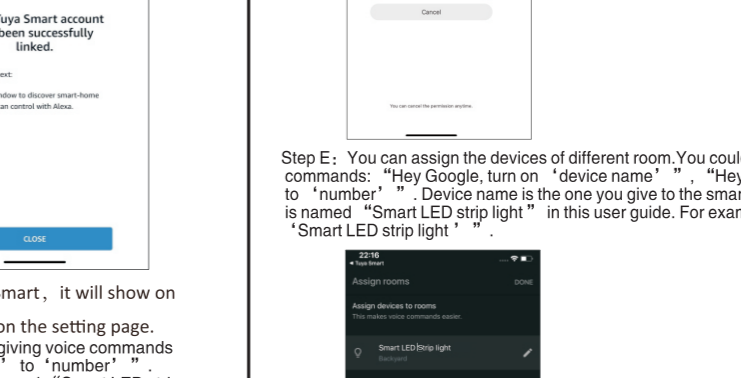


Step E: You can assign the devices of different room. You could voice control by giving voice commands: "Hey Google, turn on 'device name'." "Hey Google, set 'device name' to 'number'." "Device name is the one you give to the smart strip light. The smart strip light is named "Smart LED strip light" in this user guide. For example, "Hey Google, turn on "Smart LED strip light".

How to control the strip light by remote control

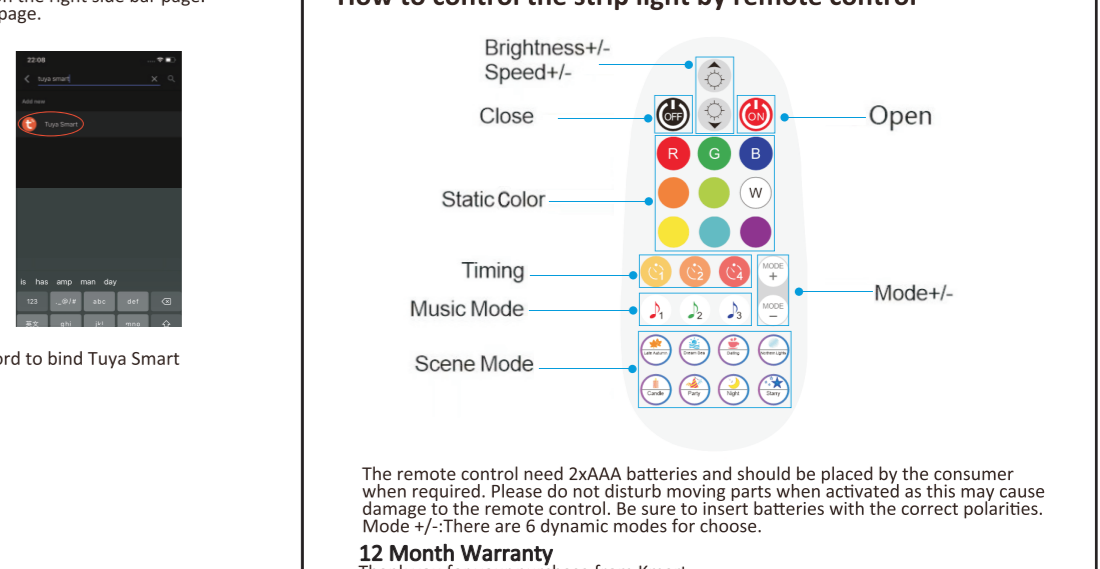

The remote control need 2AAA batteries and should be placed by the consumer when required. Please do not disturb moving parts when activated as this may cause damage to the remote control. Be sure to insert batteries with the correct polarity. Mode 1: There are 6 dynamic modes for choose.

12 Month Warranty
Thank you for your purchase from Knart. Knart Australia Ltd warrants your new product to be free from defects in materials and workmanship for the period stated above, from the date of purchase, provided that the product is used in accordance with accompanying recommendations or instructions where provided. This warranty is in addition to your rights under the Australian Consumer Law. Knart will provide you with your choice of a refund, repair or exchange (where possible) for this product if it becomes defective within the warranty period. Knart will bear the reasonable expense of clearing the warranty. This warranty will no longer apply where the defect is a result of alteration, accident, misuse, abuse or neglect. Please retain your receipt as proof of purchase and contact our Customer Service Centre on 1800 124 124 (Australia) or 0800 945 595 (New Zealand) or alternatively, via Customer Service Centre at 801 Springvale Rd, Murrumbidgee NSW, Australia or our website www.knart.com.au for more information. Warranty claims and claims for expense incurred in returning this product can be addressed to our Customer Service Centre at 801 Springvale Rd, Murrumbidgee NSW, Australia. We do not provide any guarantee that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure. For New Zealand customers, this warranty is in addition to statutory rights observed under New Zealand legislation.




43189588

GOOGLE IS A TRADEMARK OF GOOGLE LLC. AMAZON, ALEXA AND ALL RELATED LOGOS ARE TRADEMARKS OF AMAZON.COM, INC. OR ITS AFFILIATES

Please take a minute to read the below information on setting up this device. The smart strip lights can work with both Amazon Alexa and Google Assistant. After the smart strip lights has been installed it will need to be paired with an APP "TuYa Smart" downloadable from Google Play or the Apple store. Once the TuYa Smart APP is installed, it will then need to be linked with either Amazon Alexa or Google Assistant account to activate the voice control function.


This user manual consists of three parts. Part one is fundamental set-up, part two and three are alternative device set ups. If you use Amazon Alexa for voice control, please follow instructions on part one and two. If you use Google Assistant for voice control, please skip part two, follow the instructions on part one and three.

Part One: Pairing the smart strip lights to "TuYa Smart" App
Part Two: Controlling the smart strip lights with Amazon Alexa
Part Three: Controlling smart strip lights with Google Assistant

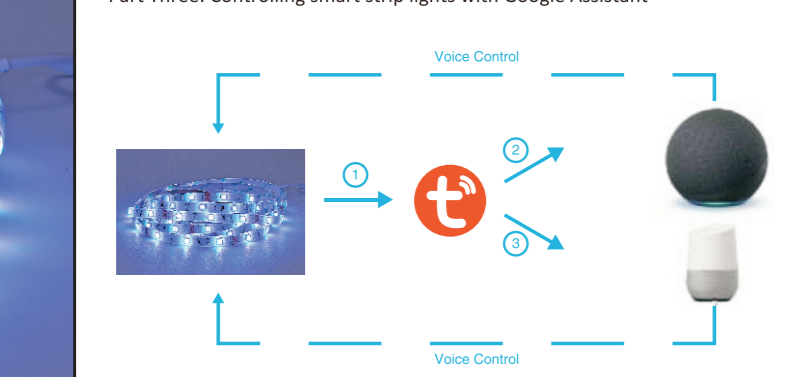


Specification
Input:220V-240V ~ 50/60Hz
(AC adapter XY12Z-1202000H-AW) Output:d.c.12V 2A
Dimension: 5M

INSTALLATION:
Before adhering strip lights, clean the surface of the area you will be placing the lights on. It is recommended to apply your strip lights on smooth stable surfaces. It should not be placed on rough, textured or painted wall surface or any surfaces that can bend or move.

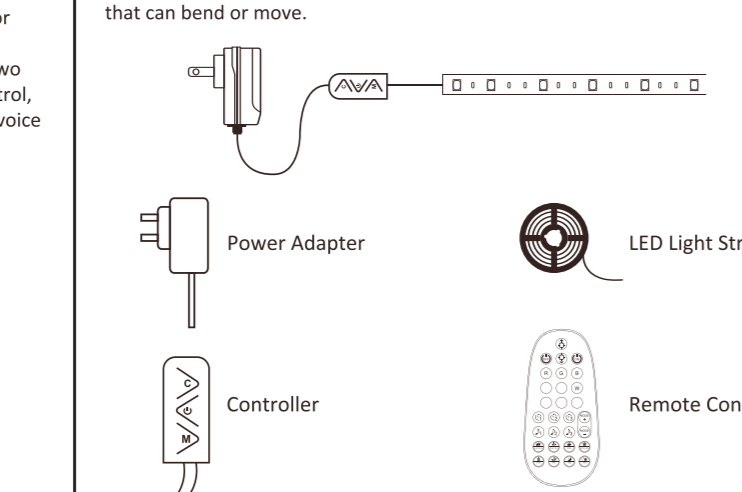

1. Unroll the strip light before usage.
2. Connect to the APP properly before installation.
3. For standalone use only. Do not connect to any more strip lights.
4. Luminares not suitable for covering with thermally insulating material.
5. Do not block the controller with metal objects.
6. There's a built-in microphone inside the controller, please place your music playing device near the controller for better results.
7. The light source of this luminaire is not replaceable, when the light source reaches its end of life the whole luminaire shall be replaced.
8. Where breakage or damage to lamps occurs, the chain must not be used/energized but disposed of safely.
9. The external flexible cable or cord of this luminaire cannot be replaced, if the cord is damaged, the luminaire shall be destroyed.
10. For indoor use only.
11. Aim at the receiver, the range of the remote control is 5M.
12. The control gear used with 43189571/43189588 only.


Product Instructions

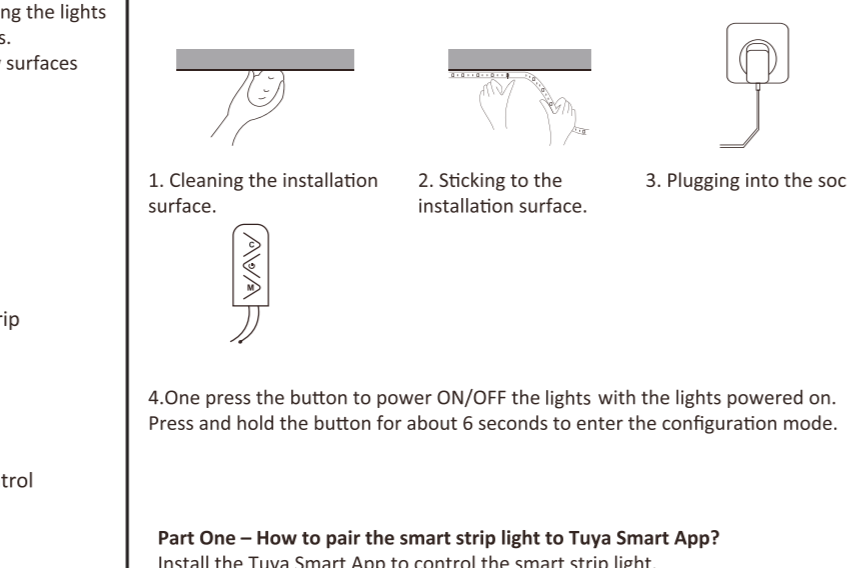


1. Cleaning the installation surface.
2. Sticking to the installation surface.
3. Plugging into the socket.

4. One press the button to power ON/OFF the lights with the lights powered on. Press and hold the button for about 6 seconds to enter the configuration mode.


Part One - How to pair the smart strip light to TuYa Smart App?
Install the TuYa Smart App to control the smart strip light.
Please download and install the app by:
1. Scanning below QR code OR Search "TuYa Smart" in Apple Store or Google Play. Create an account on TuYa Smart and login.



Note: You will need to enter these account details for Alexa or Google Assistant App pairing later

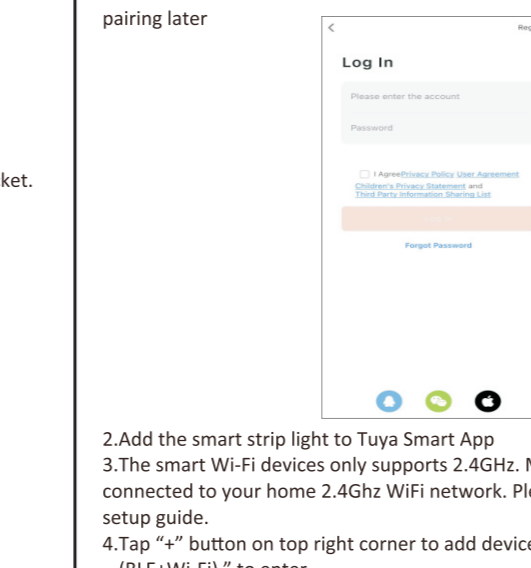


2. Add the smart strip light to TuYa Smart App
3. The smart Wi-Fi devices only supports 2.4GHz. Make sure your mobile device connected to your home 2.4GHz WiFi network. Please refer to your WiFi router setup guide.
4. Tap "+" button on top right corner to add device, then tap "strip lights (BLE-Wi-Fi)" to enter.

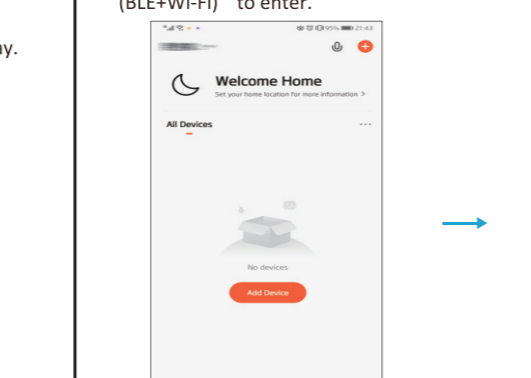


5. Press and hold the middle button of the controller for 6 seconds, the strip light will fast flash in red color, this will then enter Quick Connection Mode. Please make sure the smart strip light is standing. (The strip light in red color and flash 2 times per seconds).

Manual Control by 3 Buttons

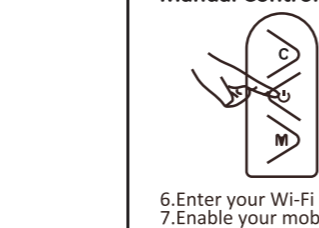


C:Scene mode
Q: Press one time ON/OFF, Press 6 seconds to reset and start to connect network.
M: Music mode.


6. Enter your Wi-Fi SSID name and Wi-Fi password in then tap "Next".
7. Enable your mobile device Bluetooth connection for easy setup mode.

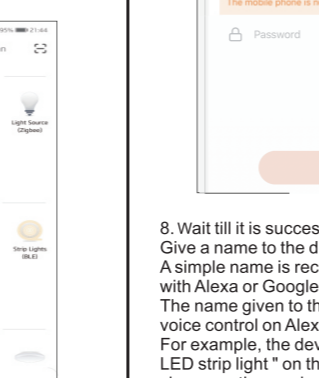


8. Wait till it is successfully connected. Give a name to the device. A simple name is recommended for easier voice recognition with Alexa or Google Assistant. The name given to the device will be the same for voice control on Alexa or Google Assistant. For example, the device is named "Smart LED strip light" in this user manual, the named device will be shown on the app homepage.

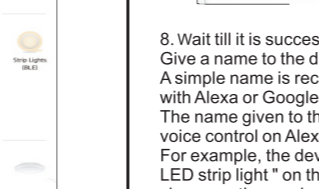

How to Control the smart strip light by TuYa Smart App
Light color mode: you can choose light color and adjust the brightness and saturation.
2. Scene mode: custom scene and recommend scene to choose.




For the custom scene, there are static/flash/breathe three modes to choose, you can DIY light color, brightness and speed of the light. For the recommend scene, there are various kinds of preset scenes can select.

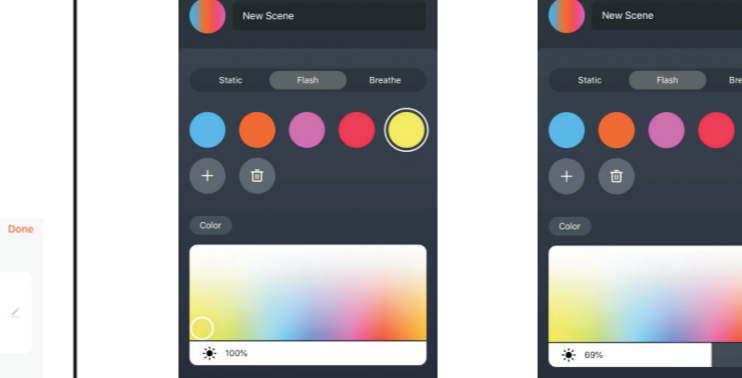


App mode: place your music playing device near the phone mic for better results. Note: the music active mode will close when you close the phone screen.


3. Music mode: There are two music active ways to choose. The strip light function will be changed with the music.

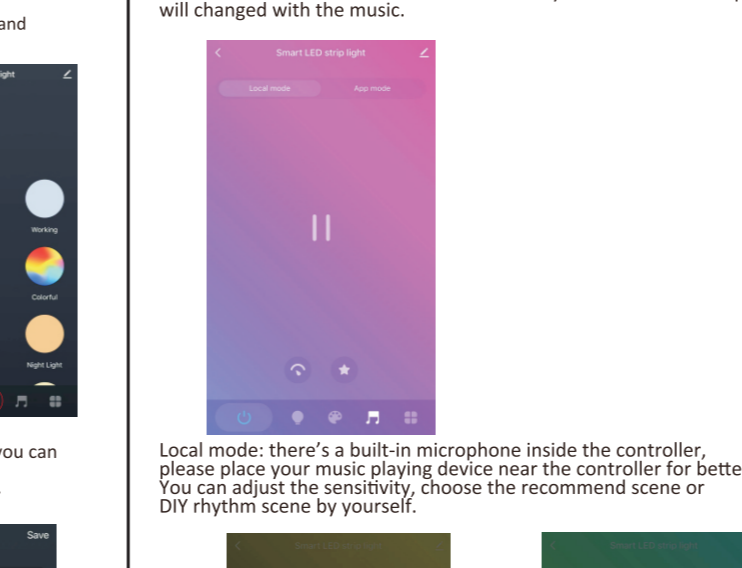


Local mode: there's a built-in microphone inside the controller, please place your music playing device near the controller for better results. You can adjust the sensitivity, choose the recommend scene or DIY rhythm scene by yourself.

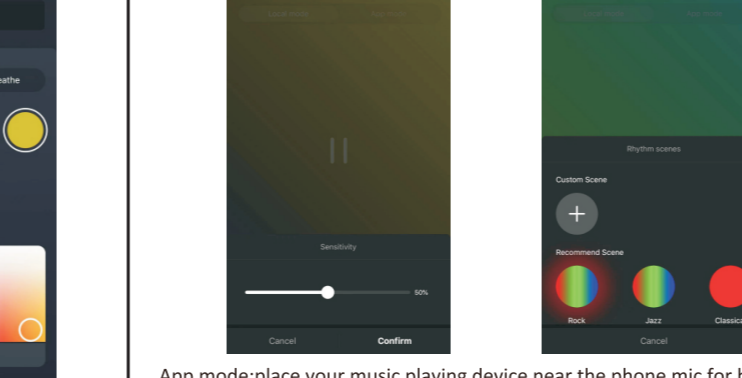


4. Set up your own schedule and timer of the light.

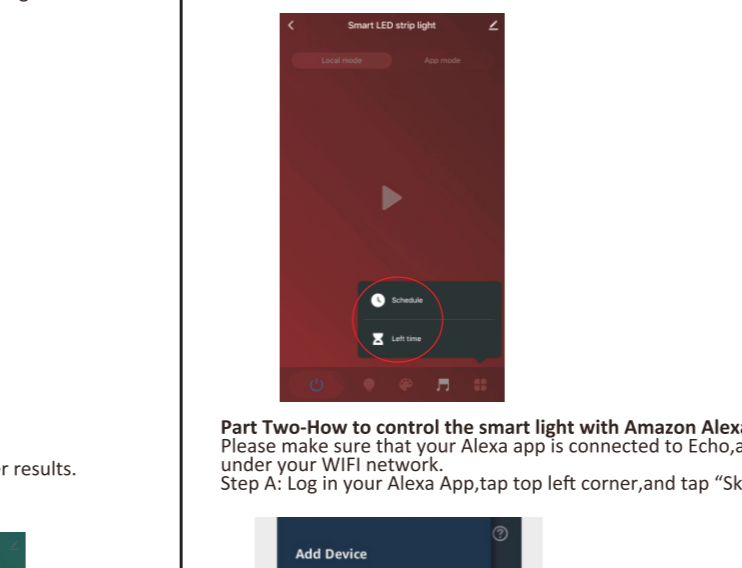


Part Two-How to control the smart light with Amazon Alexa.
Please make sure that your Alexa app is connected to Echo, and both work well under your WiFi network.
Step A: Log in your Alexa App, tap top left corner, and tap "Skills and Games"

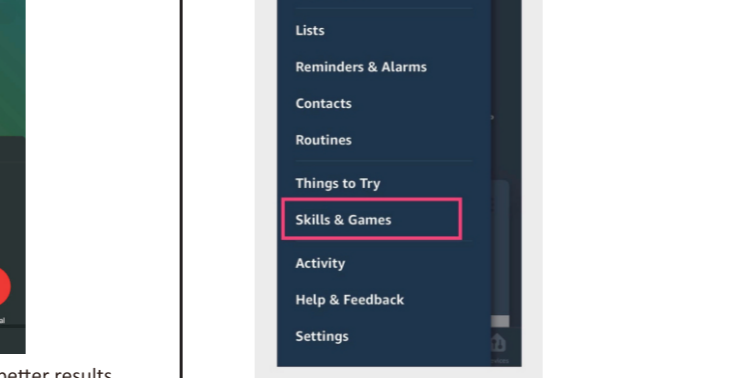

Step B: Type "TuYa Smart", and "TuYa Smart" from the search result, and tap it to enable the skill.

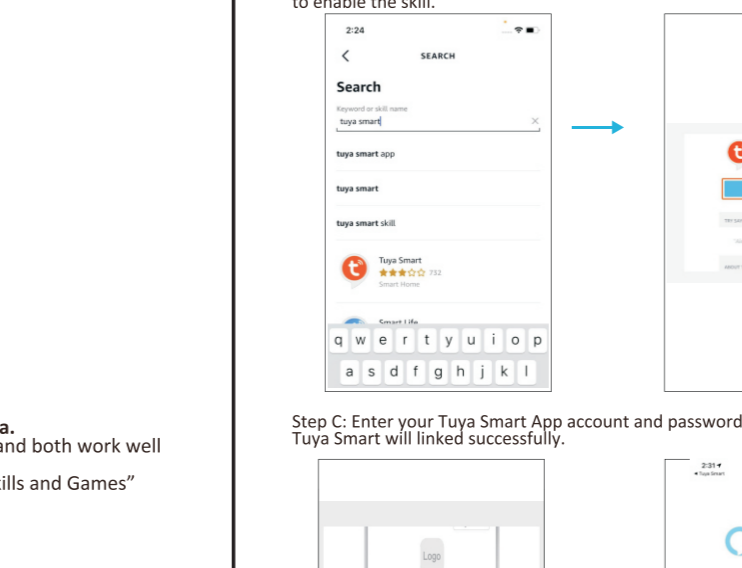


Step C: Enter your TuYa Smart App account and password. Tap "Link Now", then TuYa Smart will linked successfully.

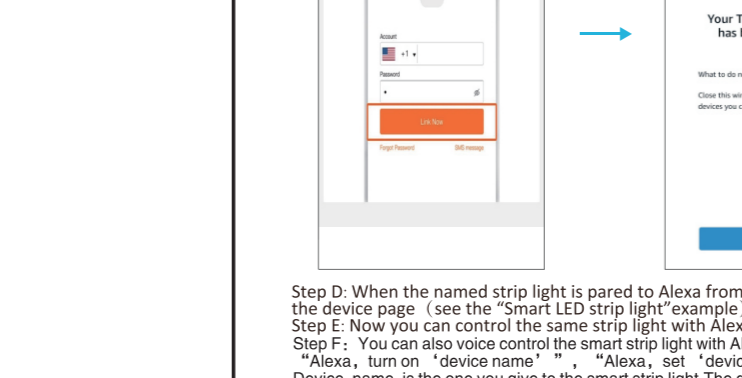


Step D: When the named strip light is paired to Alexa from TuYa Smart, it will show on the device page (see the "Smart LED strip light" example).

Step E: Now you can control the same strip light with Alexa app on the setting page.
Step F: You can also voice control the smart strip light with Alexa by giving voice commands "Alexa, turn on/turn off/turn on/turn off TuYa Smart".
Device name is the one you give to the smart strip light. The device named "Smart LED strip light" in this user guide. For example, "Alexa, turn on/turn off Smart LED strip light".

Part Three-How to control smart light with Google Assistant.
Step A: Log in Google Assistant App, tap "Home control" on the right side bar page.
Step B: Tap "+" button on the bottom right to enter next page.
Step C: Find "TuYa Smart" from side bar list.

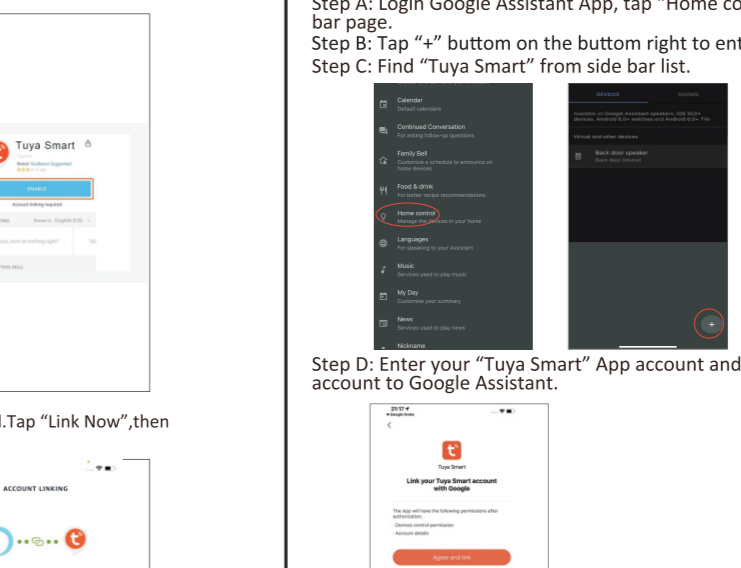


Step D: Enter your "TuYa Smart" App account and password to bind TuYa Smart account to Google Assistant.

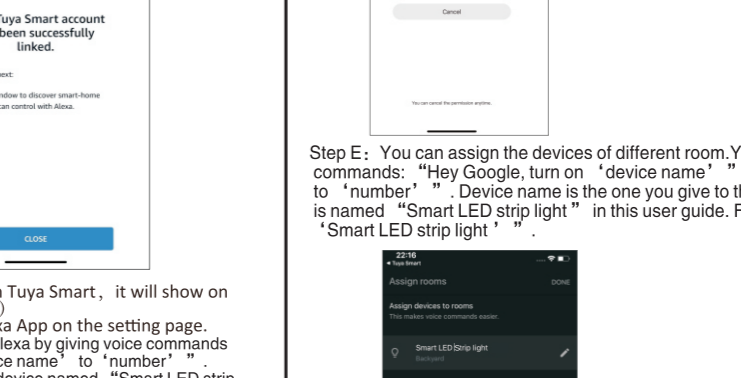

Step E: You can assign the devices of different room. You could voice control by giving voice commands: "Hey Google, turn on 'device name'." "Hey Google, set 'device name' to 'number'." "Device name is the one you give to the smart strip light. The smart strip light is named "Smart LED strip light" in this user guide. For example, "Hey Google, turn on "Smart LED strip light".

How to control the strip light by remote control

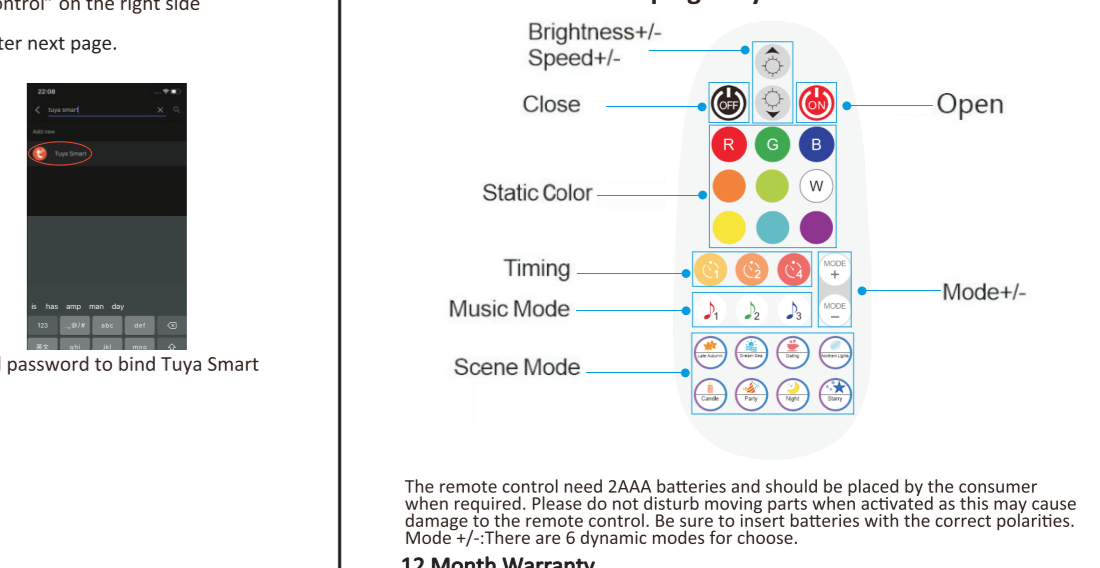

The remote control need 2AAA batteries and should be placed by the consumer when required. Please do not disturb moving parts when activated as this may cause damage to the remote control. Be sure to insert batteries with the correct polarity. Mode 1: There are 6 dynamic modes for choose.

12 Month Warranty
Thank you for your purchase from Knart. Knart Australia Ltd warrants your new product to be free from defects in materials and workmanship for the period stated above, from the date of purchase, provided that the product is used in accordance with accompanying recommendations or instructions where provided. This warranty is in addition to your rights under the Australian Consumer Law. Knart will provide you with your choice of a refund, repair or exchange (where possible) for this product if it becomes defective within the warranty period. Knart will bear the reasonable expense of clearing the warranty. This warranty will no longer apply where the defect is a result of alteration, accident, misuse, abuse or neglect. Please retain your receipt as proof of purchase and contact our Customer Service Centre on 1800 124 124 (Australia) or 0800 945 595 (New Zealand) or alternatively, via Customer Service Centre at 801 Springvale Rd, Murrumbidgee NSW, Australia or our website www.knart.com.au for more information. Warranty claims and claims for expense incurred in returning this product can be addressed to our Customer Service Centre at 801 Springvale Rd, Murrumbidgee NSW, Australia. We do not provide any guarantee that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure. For New Zealand customers, this warranty is in addition to statutory rights observed under New Zealand legislation.