


anko

Quick Start Guide

FULL HD Wi-Fi OUTDOOR CAMERA

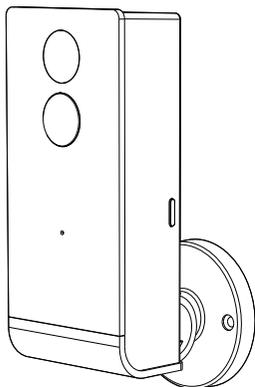


Model: Snap 5S
KEYCODE: 42799351


Welcome

Thank you for choosing our smart camera. Getting started is easy.

1. What's Included

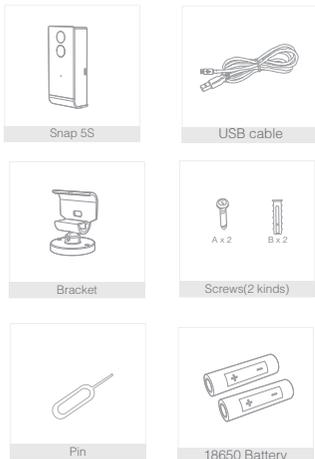

2. Product Details

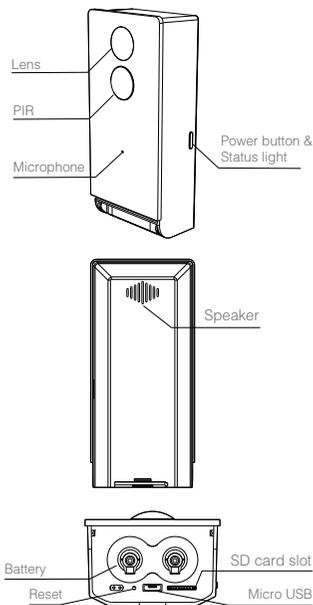

3. Connection Preparation

Bring the camera and phone within 1 to 3 feet (30 to 100 centimeters) of the router.



Note: Make sure your phone is connected to your 2.4Ghz WiFi, not 5Ghz.

if you having connection issue and your router is dual-band router, you will need to disable the 5Ghz Wi-Fi Signal in order to connect.

Please contact your Internet provider regarding how to disable/turn off 5Ghz Wi-Fi signal in your router.

4. Get the APP and Account


For the best experience, please download the "Mirabella Genio" APP to your smartphone from App Store or Google Play, or you can also scan the QR code below, the APP icon will be displayed after installed successfully.



Launch the app from your smart phone and click the Sign Up button. Follow the on-screen instructions.

5. Insert the Micro SD card


Insert the Micro SD card gently on the SD card slot of camera. (optional, camera can work without it) if you wish to use the playbackfunction, you must insert a Micro SD card.




*Micro SD card not included, support FAT32 format only card size must >= 8GB, <=128GB

Camera Installation

- 1 Fix the bracket on the wall
2. Install rubber seal

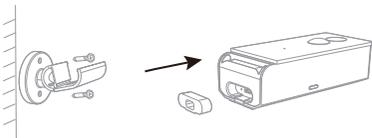


*NOTE: Remove the rubber to reset

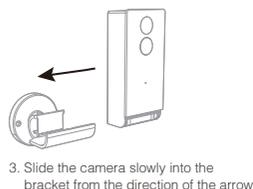

3. Slide the camera slowly into the bracket from the direction of the arrow

4. Adjust the camera to desired angle

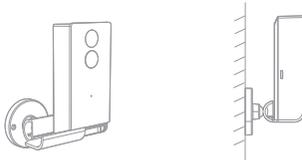

6. Pairing the camera using Mirabella Genio App

1. Press and hold down the power button, release it when status light turns red.


2. Wait for 6-10 seconds, status light will start blinking RED slowly, camera is in the pairing mode and it is ready to pair.

3. Connect your mobile phone to a 2.4Ghz Wi-Fi network. (5Ghz is not supported, if you having connection issue, please disable the 5Ghz Wi-Fi on your router.)

4. Open and log into "Mirabella genio" APP, tap on the + icon, tap on security sensor, select smart camera, confirm the LED is blink RED slowly, then tap on the next step, enter the Wi-Fi name and password, tap on "confirm", tap on "continue", the mobile phone will display a QR code, hold the phone steady 10cm to 15cm in front of the camera, for the camera to scan the QR code, when you heard the dingdong sound and when the RED status light changes into BLUE, camera has successfully scanned the QR code.

If camera fails to scan the QR code, and LED did not change to BLUE, you need to reset the camera, by press the reset hole using the pin, when you hear the dingdong sound, let go of the pin, LED will start to blink RED slowly.

Alternatively, pairing with Smart Mode method Tap on "Otherwise" -> select "Smart Mode" -> follow the APP's instruction to complete the network pairing process

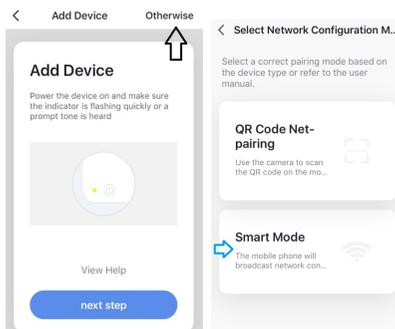

6. Tap on the APP to finish the pairing process and status light turns into solid BLUE, the camera is paired and ready to use. if it doesn't change to BLUE, please check the WIFI password and make sure 5Ghz is disabled on router and confirm the LED is blinking RED slowly, not fast, and try the QR pairing process again.

NOTE: rechargeable battery can be recharged with supplied USB cable and standard 5V 1A mobile phone USB adaptor (not included)

You're done!

Congratulations! Your camera is set up and ready to go.

WARNING: Li-ion battery handling notice

Always read the instruction manual and any warnings on the device before using a lithium-ion battery.

Rechargeable lithium-ion batteries can explode, release flames, and/or cause burns if disassembled, punctured, cut, crushed, short-circuited, incinerated, recharged incorrectly, or exposed to water, fire, or high temperatures.

1. Use the battery charger and AC adapter specified for use with the lithium-ion battery.
2. Do not force the lithium-ion battery into a battery charger or device if it does not fit.
3. Do not throw lithium-ion batteries into a fire or heat source also lead to overheating, explosion or fire.
4. Do not connect the positive and negative terminals of the lithium-ion battery with a metal object.
5. Do not throw lithium-ion batteries, drop them from high places, or otherwise subject them to strong impacts
6. Do not put a lithium-ion battery in a microwave oven, pressure container, or other such devices.
7. Do not place combustible materials on top of or over a lithium-ion battery when charging or discharging.
8. Do not disassemble or modify a lithium-ion battery.
9. When the electric device is not being used for an extended period of time, remove the lithium-ion batteries from the device and store them in a dry place.
10. Keep devices that contain batteries and batteries themselves out of reach of children. Mishandling of lithium-ion batteries is dangerous.
11. Lithium-ion batteries have finite life spans. If the batteries require constant recharging, replace them with new ones.
12. If battery leaks or gives off an unusual odor, immediately remove it and place it away from any naked flame.
13. Never dispose of a lithium-ion battery in your regular trash or recycling bin, contact your local council for recycling options.

Product Specification

Power Port	DC 5V ± 10%
Power	Press the button for 3 seconds to turn on/off the camera
Status light	<ul style="list-style-type: none"> Red light solids on: the camera network is abnormal Red light blinks Slowly: awaiting for pairing, ready to scan QR code or ready for Smart Mode connection Red light blinks Fast: awaiting WiFi connection Blue light blinks on: waiting to connect to cloud service Blue light solids on: camera is online running correctly
Microphone	Capture sound for your video
SD card slot	Support local SD Card storage (Min 8G, Max 128G Fat32 only)
Reset	Press and hold on for 5 seconds with pin to reset the camera

Remote wake-up

The camera will be in a sleep mode to save power; you can have a preview in App.

Low battery alarm

You can set a low-battery alarm threshold in your phone App. The threshold is set to a minimum of 10% and a maximum of 50%. When the battery power of the camera is lower than the set threshold, the App will have a reminder.



All trademarks are used for reference purposes only.

MADE IN CHINA

ANKO, HOMER&CO. AND AUDIOSONIC® ARE TRADEMARKS OF KIMAT AUSTRALIA LIMITED.

MIRABELLA INTERNATIONAL PTY LTD
MIRABELLA DRIVE, TULLAMARINE, VICTORIA, AUSTRALIA 3043
TOLL FREE: 1800 636 528 WWW.MIRABELLAGENIO.COM.AU