

# 297x210mm

## 43275076 ANITA WIRED-IN PENDANT LIGHT

### IMPORTANT SAFETY INSTRUCTIONS:

The following safety precautions should always be followed, to reduce the risk of electric shock, personal injury or fire. It is important to read all of these instructions carefully before using the product, and to save them for future reference or new users.

### INSTALLATION REQUIREMENTS:

- Must be assembled and installed by a licensed electrician.
- All wiring and installation of the luminaire must adhere to the latest local and national wiring rules. E.g. AS/NZS 3000 Electrical Installations.
- Do not exceed the maximum wattage rating.
- This pendant requires: 1x Max 40W E27 Edison Screw bulb (Not included)
- Select a suitable location for installation:
  - This luminaire is suitable for indoor use only.
  - The mounting point must support 2 times the weight of the luminaire.
  - Ensure the luminaire is not installed in direct line of an air vent/system.
  - If installing a luminaire in an area prone to moisture, ensure that the area is well ventilated, and an appropriately rated exhaust fan is used if required. Damage or corrosion caused by moisture is not a product fault, and as such is not covered under warranty.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure no components are missing before assembling.
- If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the luminaire has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
- Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.
- If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.

### INSTALLATION DIRECTIONS:

1. Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging material. If assembly is required, place the luminaire on a smooth non-scratch surface.
2. The suspension's length must only be adjusted by a licensed electrician.

### SAFETY TIPS:

- Always ensure the power is OFF and the luminaire has cooled down before performing any maintenance, cleaning, changing the globe or making any adjustment to the luminaire.
- To avoid injury or damage to the luminaire, ensure that power leads and screws are secure before connecting the power.
- Select a suitable location away from liquids and hazards.
- To clean, wipe with a soft damp cloth. Do NOT soak or immerse the luminaire in water or other liquids.
- Ensure that the luminaire does not come in contact with corrosive chemicals/solvents or abrasive cleaners etc.

### PRODUCT SPECIFICATION

Rated voltage: 220-240V ~ 50Hz  
 This pendant requires: 1x Max 40W E27 Edison Screw bulb (Not included)  
 7-9W LED recommended for medium brightness

**WARNING: THIS PRODUCT MUST BE INSTALLED BY A LICENCED ELECTRICIAN**


### ELECTRICAL CONTRACTOR INSTALLATION INFORMATION

- Step ①: install the Expansion screws into the ceiling. Ensure the screws used are suitable for the mounting surface and the surrounding environment.  
 Step ② & ③: Install the mounting bracket in "U" shape by using appropriately sized mounting screws, into the expansion screws.  
 Step ④: Connect the mains supply wire to the terminal block. Install the blue wire into "N", Brown wire into "L". And then tighten the screws for the wire connector.

Mains Supply Wire	Luminaire Wire / Terminal Block
Earth – Yellow/Green	Yellow/Green
Neutral – Blue	Blue or N
Live – Brown	Brown or L

- Ensure the wires are secure and no bare wires are exposed.  
 Step ⑤ & ⑥: Install the canopy back onto the mounting bracket and secure by tightening the screws on the sides.  
 Step ⑦: Install the glass shade to the lampholder cover and secure by lampholder ring.  
 Step ⑧: Install a globe (E27 – not included) into the lamp holder.  
 Do not exceed the maximum wattage rating.  
 After the installation, switch on the luminaire to test all the lighting functions and enjoy your new luminaire.

**Due to electrical safety & legal requirements, this light must be installed by a qualified electrician. The installation certificate of compliance must be retained and provided for any warranty related claims**

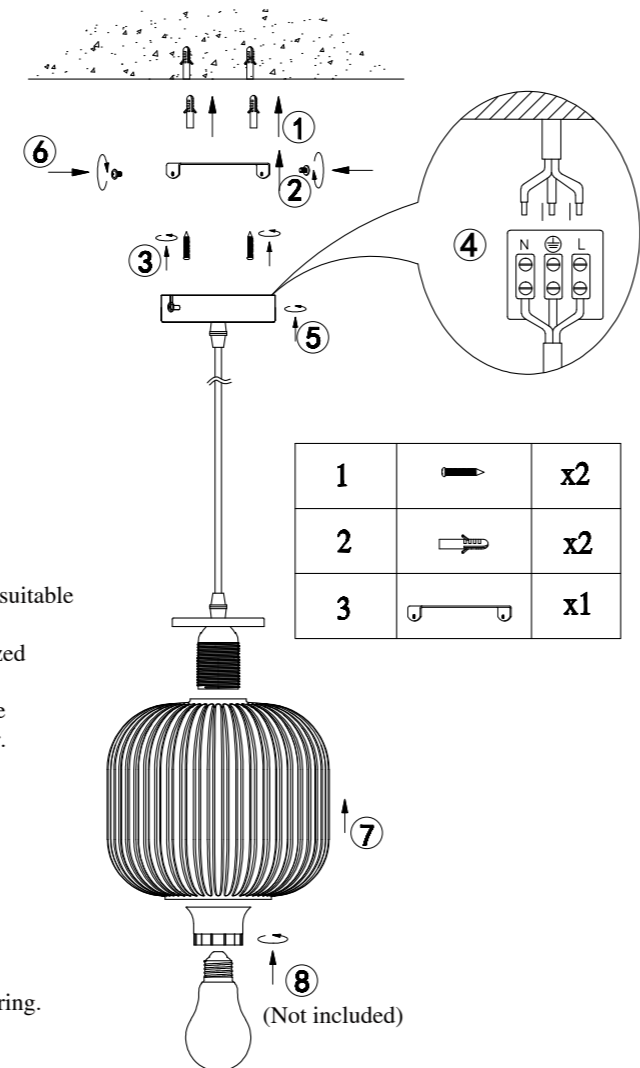

# FRONT

## 12 Month Warranty



Thank you for your purchase from Kmart.

Kmart Australia Ltd warrants your new product to be free from defects in materials and workmanship for the period stated above, from the date of purchase, provided that the product is used in accordance with accompanying recommendations or instructions where provided. This warranty is in addition to your rights under the Australian Consumer Law.

Kmart will provide you with your choice of a refund, repair or exchange (where possible) for this product if it becomes defective within the warranty period. Kmart will bear the reasonable expense of claiming the warranty. This warranty will no longer apply where the defect is a result of alteration, accident, misuse, abuse or neglect.

Please retain your receipt as proof of purchase and contact our Customer Service Centre on 1800 124 125 (Australia) or 0800 945 995 (New Zealand) or alternatively, via Customer Help at Kmart.com.au for any difficulties with your product. Warranty claims and claims for expense incurred in returning this product can be addressed to our Customer Service Centre at 690 Springvale Rd, Mulgrave Vic 3170.

Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

For New Zealand customers, this warranty is in addition to statutory rights observed under New Zealand legislation.

# BACK