



**I005281 Mirabella Genio
120cm Pixel LED Twin Bar**

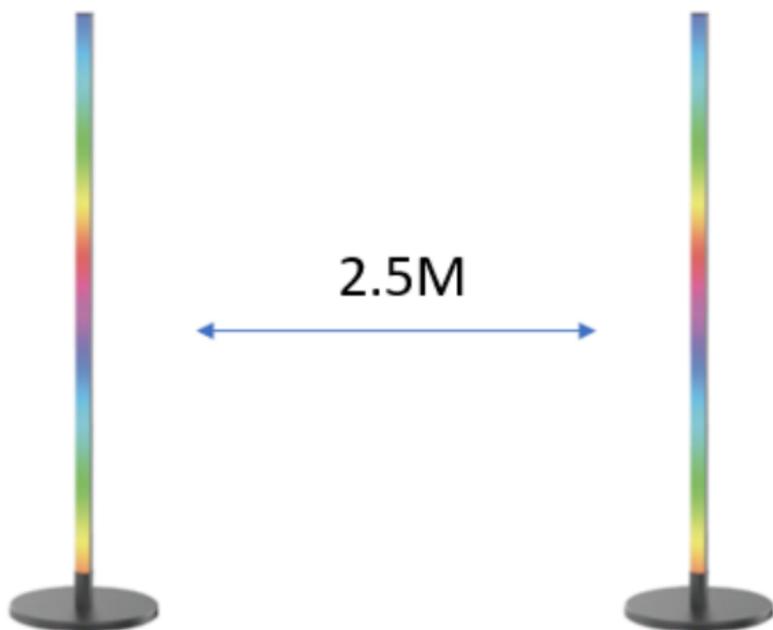


Please read this manual carefully before using the product and keep it for future reference.

Product Specification



1200MM/3.94 ft
Slave Music light ×2

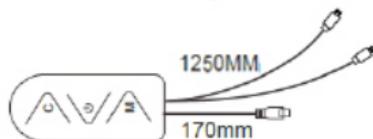

LED Controller ×1




L:1500 mm
Power × 1



167×15mm
Base × 2



108×50 mm
Remote control ×1

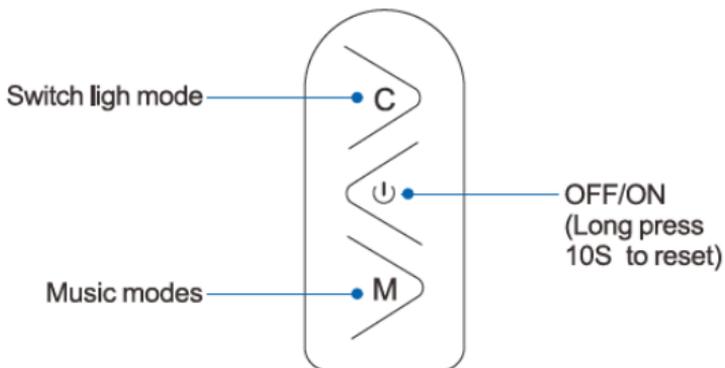

Switch light mode

C



Music modes

M

OFF/ON
(Long press
10S to reset)


If you don't have Wi-Fi at home or you are unable to pair it to the app, simply wait for 3 minutes for the light to stop blinking, then manually press C button on Wi-Fi controller or IR remote controller to change colour and modes manually.

Product Installation

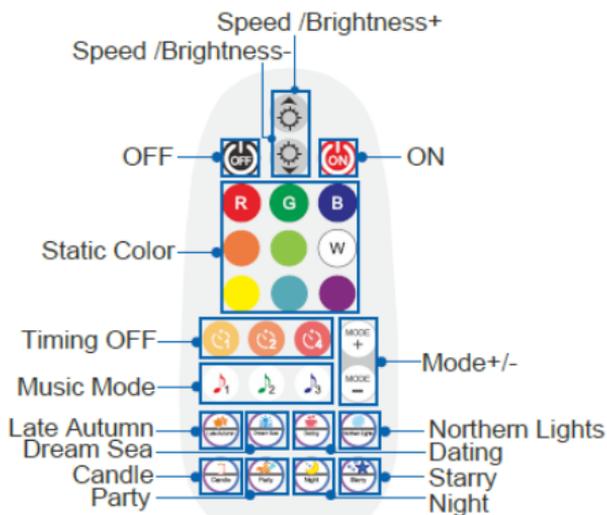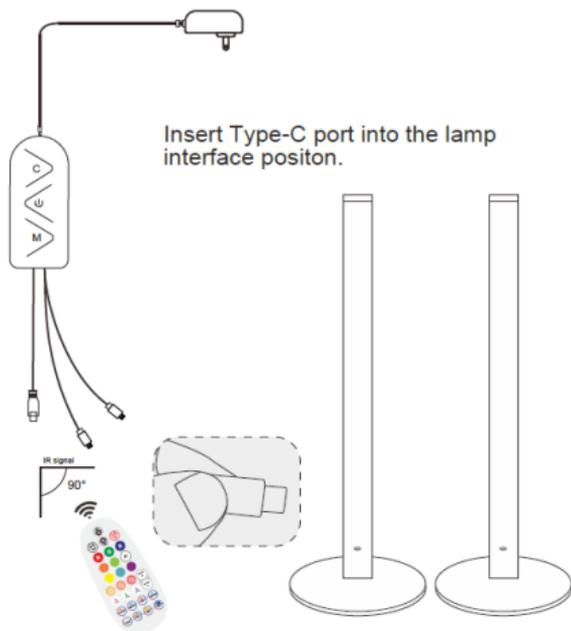

1. Wi-Fi Connection Preparation

Your phone must be connected to 2.4Ghz Wi-Fi and not to the 5GHz, To verify

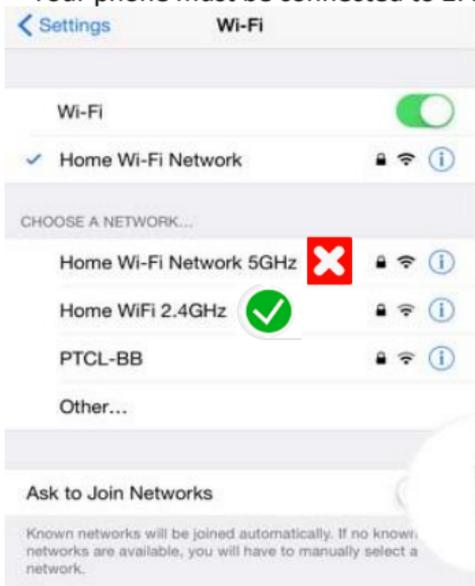

your mobile phone is connected to the 2.4Ghz Wi-Fi network, Navigate to the Setting menu and click on Wi-Fi. In this menu you will see all detectable networks in your area. Locate the SSID for your network, select the Wi-Fi SSID that **does NOT** end with 5GHz. (refer to the image).

Check you have a strong Wi-Fi signal (at least two bars) in the location where the smart device is to be installed.



If you don't have at least two bars signal on your phone, then you may need to reconsider the location or getting a Wi-Fi extender to boost the Wi-Fi signal strength.

If you have dual band router but you don't see two Wi-Fi name SSID's, one with 5G and one without 5G, you **MUST** log into the router and manually disable the 5Ghz Wi-Fi signal. if you're having connection issues. Please contact your internet provider on how to disable 5Ghz Wi-Fi for your router or check our website FAQ section. www.mirabellagenio.com.au

Install the APP and register Account


For the best experience, download the "Mirabella Genio" APP to your smartphone from the App Store or Google Play, The APP icon will be displayed after it's installed successfully

Bluetooth pairing assistant function


Our latest genio smart Wi-Fi range has a Bluetooth pairing assistant function, to make the pairing even easier than before, to take advantage of this function, please turn on the Bluetooth function on your phone, connect the two light bars and switch the power on wait for the light starts to blink red

rapidly (2 blinks per second)

If it does not automatically start to blink rapidly when first powered on, press and hold the **ON/OFF** button on the Wi-Fi Controller and wait for the light to start blinking RED

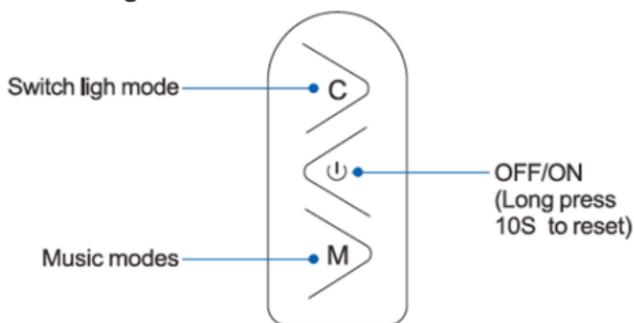


Open Mirabella genio APP, tap on + , wait for the APP to automatically discovery the smart device , please ensure that you are using the 2.4Ghz Wi-Fi name and password, do not use the Wi-Fi Name ending -5G

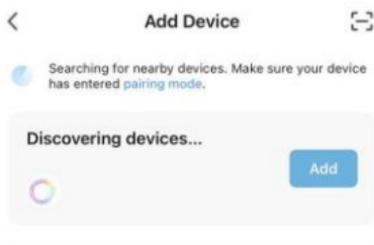

If the Bluetooth method does not work, please turn off Bluetooth on your phone and use the EZ method to pair – when the light is fast blinking RED (2 blinks per second)

1. connect the two light bars and switch the power on, wait a few seconds, light will commence blinking RED rapidly (2 blinks per second)
2. If it does not automatically start to blink rapidly when first powered on, press and hold the ON/OFF button on the Wi-Fi switch controller, until the light starts to blink rapidly (2 blinks per second)
3. Open Mirabella Genio APP, tap on + symbol, add device then Ambient Lighting choose **Genio 120cm Bar Light** from the list

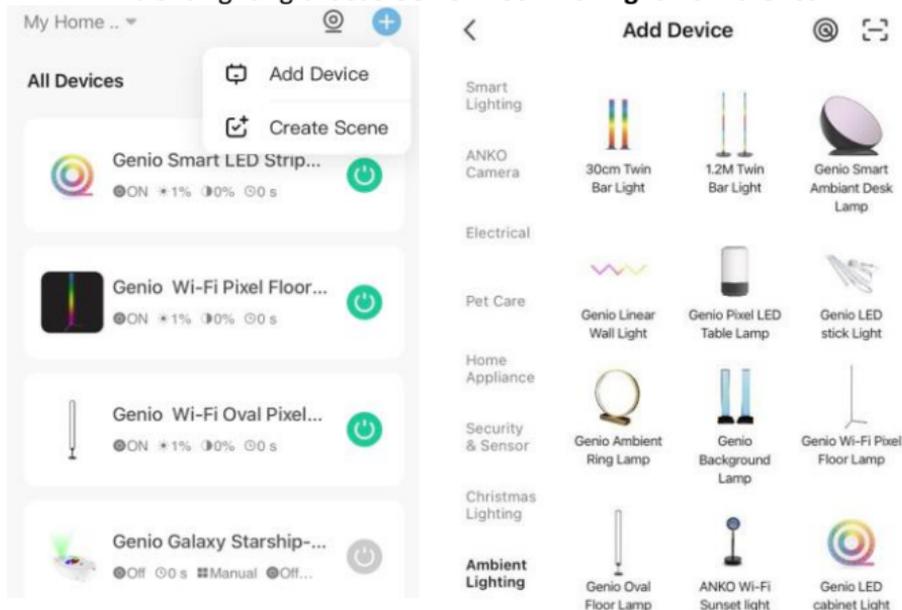

4. Enter your 2.4Ghz Wi-Fi name and password, (make sure Wi-Fi name doesn't end with -5G)

Follow the APP's instructions carefully to complete the network pairing process.

Select 2.4 GHz Wi-Fi Network and enter password.

If your Wi-Fi is 5GHz, please set it to be 2.4GHz. [Common router setting method](#)




if the fast-blinking method (EZ method, mentioned above) doesn't work for you , please try the slow blinking (AP method) below.

While the bar light is rapidly blinking, press and hold the pairing button on the Wi-Fi controller again and then wait for the light to start blinking slowly (1 blink per every 2 seconds)


Open up the Mirabella genio APP, tap on + , add device then choose **Genio 120cm bar Light** from the **Ambient Lighting list**

Enter your 2.4Ghz Wi-Fi name and password, (make sure the Wi-Fi name doesn't end with -5G), then in reset the device first screen tap on EZ mode (in the Top right hand corner just below the your phone's battery icon),

select AP Mode (refer to the 1st and 2nd image below) Now Confirm indicator slowly blinking (refer to image 3), hit Next, then Go to connect and connect to Wi-Fi named SmartLife_XXXX

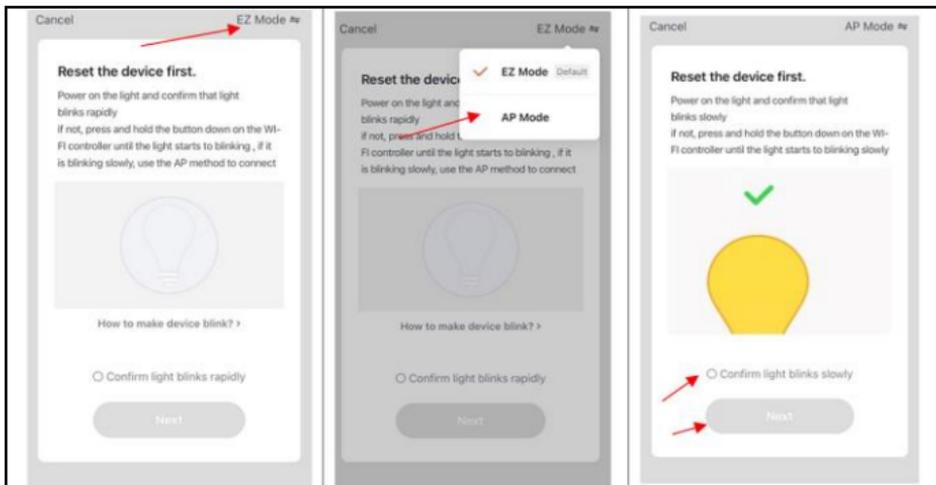

Note: If you would not see Wi-Fi name beginning with the word SmartLife_XXXX then the device is not slowly blinking, please reset and ensure that it is slowly blinking.

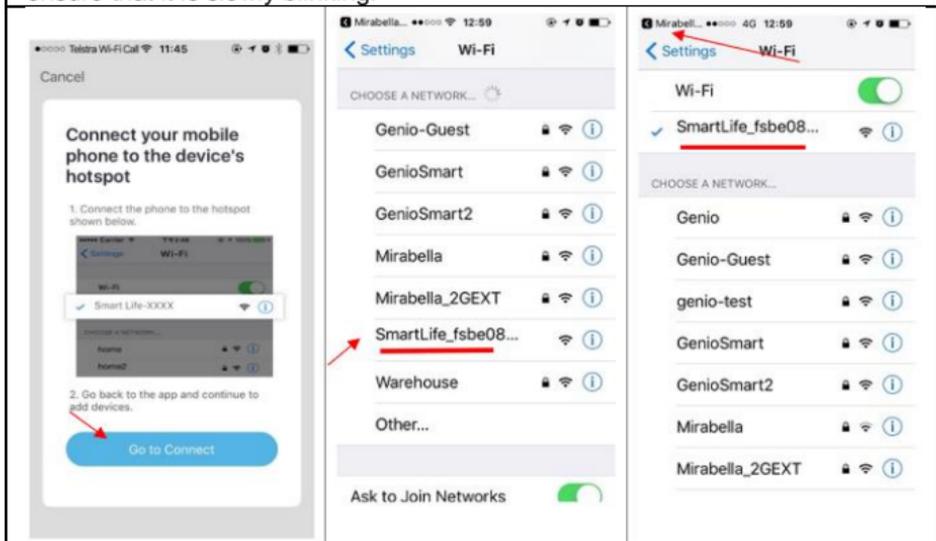

After connected to SmartLife_XXXX, return to the Mirabella Genio APP and it will commence adding device



Please pay attention to this screen to determine the cause of the time-out error

If the light never stops blinking, there could be an issue with your phone setting, if you are using IOS 14, please ensure local network permission is turned on for Genio APP

if light stopped blinking, but unable to progress to “register on cloud” it indicates a communication error with your router to our cloud service, please check your router setting

please check our online FAQ page and ensure

1. You enter the correct 2.4Ghz Wi-Fi name and password
2. Wi-Fi controller is in a location with good Wi-Fi coverage, try move it closer to the router for the pairing process
3. 5Ghz Wi-Fi signal is turned off on the router (5Ghz can be turned on after the device is connected)

FAQ:

Q. I have internet/power outage and device went offline and doesn't reconnect back online by itself?

A. Go to the light settings page (... or pencil looking icon), look for “remove device” Remove it and reset the device and pair it again through the app.

Mirabella International Pty Ltd
1 Mirabella Drive Tullamarine VIC. 3043 Australia
t: 1800 636 528
e: customerservice@mirabella.com.au